



Nice

New
Era Inn Edge
S Li-ion
tubular battery motor

Nice

Era Inn Edge S Li-ion

Wireless, rechargeable motors

Tubular motors with integrated lithium ion battery technology. Eliminates the need for a wired connection or external power supply, allowing easy installation and set-up.

Era Inn Edge S Li-ion is the perfect solution for residential and commercial renovations without the need for existing wires.



USB C recharge
compatibility



LEDs display state of
charge and diagnostics



The only battery motor
with perfect hembar
alignment every time



Touch control Go-To Position



Ultra-quiet 35 dB



App control



60W quick recharging

Advanced Technology
ensures perfect hembar
alignment every time

Integrated lithium-ion
battery with optional
magnetic connector

Nice

Era Inn Edge S Li-ion

For interior roller blinds - with electronic limit switch, built-in radio receiver and integrated rechargeable battery.

S size ø 35 mm



NEW

Lithium-ion

Obstacle detection while opening and closing.

Perfect blind alignment, even with multiple installations: constant motor speed under all load conditions allows Era Li-ion to be the only battery motor with perfect hembar alignment every time.

LED status lights indicate battery state of charge and diagnostics.

Go To Position function: simply touch the desired position on the touchbar of a compatible transmitter to move the blinds to this position.

Constant speed up/down.

Adjustable open and close speed via touchbar slider.

Electronically controlled Soft Start and Soft Stop functions enables Smooth Move technology.

On/Off switch makes programming multiple motors simple.




TECHNICAL SPECIFICATION

Code	Description	Pcs./pack	Certificates
E EDGE SI 288DC	Electronic limit switch, built-in radio receiver and integrated rechargeable battery. 2 Nm, 28 rpm	1	CE

Code	E EDGE SI 288DC
MECHANICAL FEATURES	
Motor Diameter Ø (mm)	35
Length (mm)	530
Protection Class	IP30
TECHNICAL FEATURES	
Torque (Nm)	2
Nominal speed (rpm)	28
Working temperature	0 - 60 °C / 32 - 140 °F
Noise [dB(A)]*	35
Radio	433 MHz monodirectional (F-CODE)
BATTERY FEATURES	
Battery type	Lithium-Ion
Battery life (cycles)	450
Capacity (Wh)	45
RECHARGE DISTINCTIVE FEATURES	
Connector	USB TYPE C
Recharge system	USB PD up to 60W
Recharge speed (h)	1.5 (approx.)

*Noise level measured in accordance with EN ISO 3745, EN ISO 3746, EN 60704-1. Noiseless brake.


DIMENSIONS

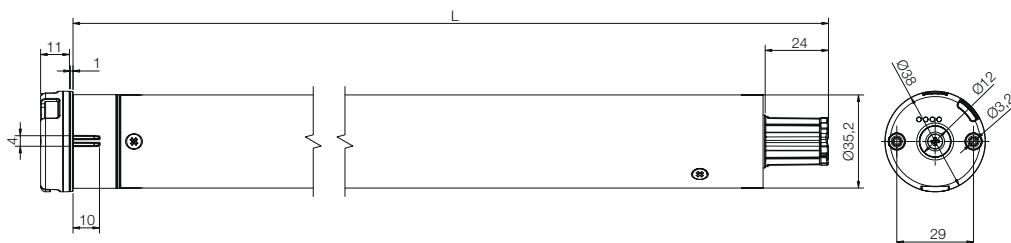

Nice connectivity

NEO

NEO Smart Controller.

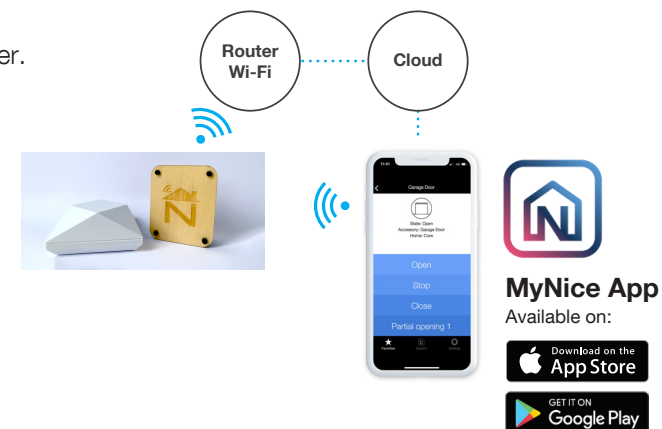

Nice control devices



Era P and Era W Series

Portable and wall-mounted transmitters

Ergonomic design and intuitive use for this line of transmitters to control indoor blind automations with touchbar slider for the "Go to Position" function. Available in one and six channel version. Up to six groups of automations can be controlled in single, group, or multigroup mode.



Air

Wall-mounted touchless radio transmitter

With its elegant design, Air is the perfect solution for all applications. Perfectly suited for public, high traffic or sterile areas. The ideal solution to add a touch of elegance and a contemporary feel to the home or office. For controlling one automation or group of automations.

We make even the smallest of gestures extraordinary.

Nice, a world without limitations.

Automation and control systems for gates, garage doors, blinds, awnings and rolling shutters and alarm systems for all types of space, from private homes to large public buildings.

www.niceforyou.com

Nice North America



Nice cares for the environment.
Using natural paper it avoids
excessive use of raw materials
and forest exploitation.
Waste is reduced, energy is saved
and climate quality is improved.